


Front Fender Moulding - F-450/F-550


Removal

NOTE: Removal steps in this procedure may contain installation details.

1.

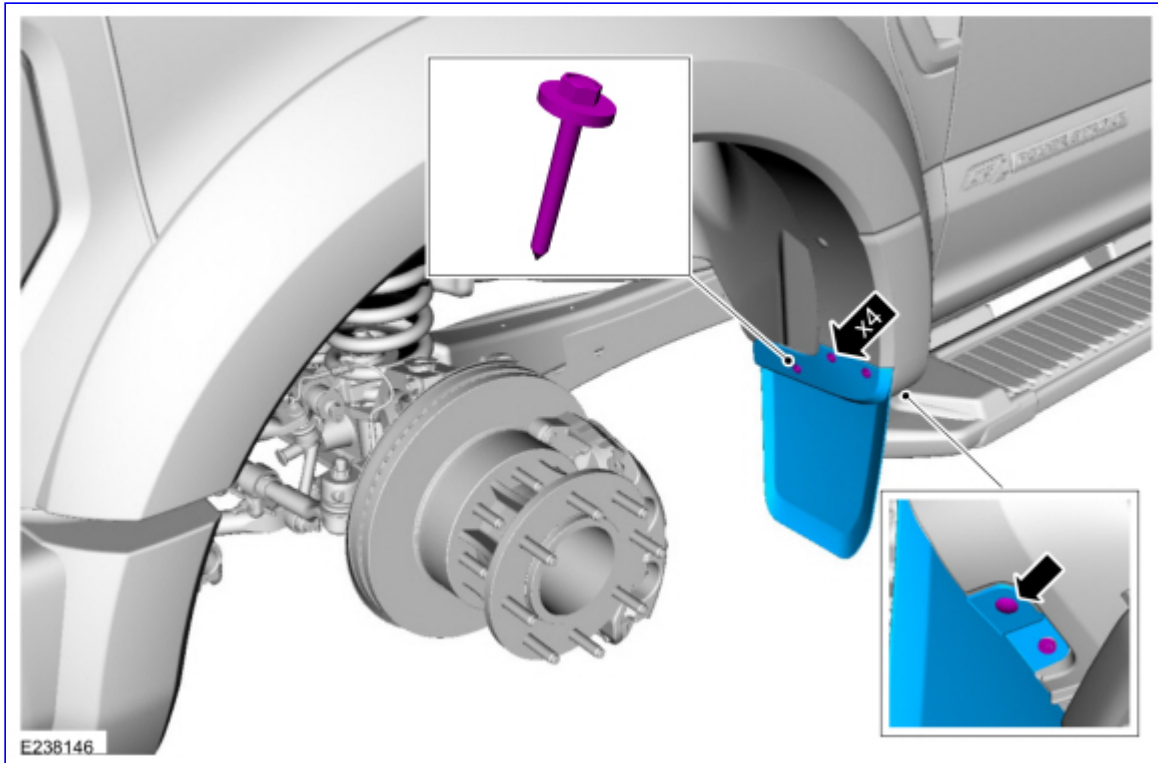


2. Remove the push pins and the retainer.

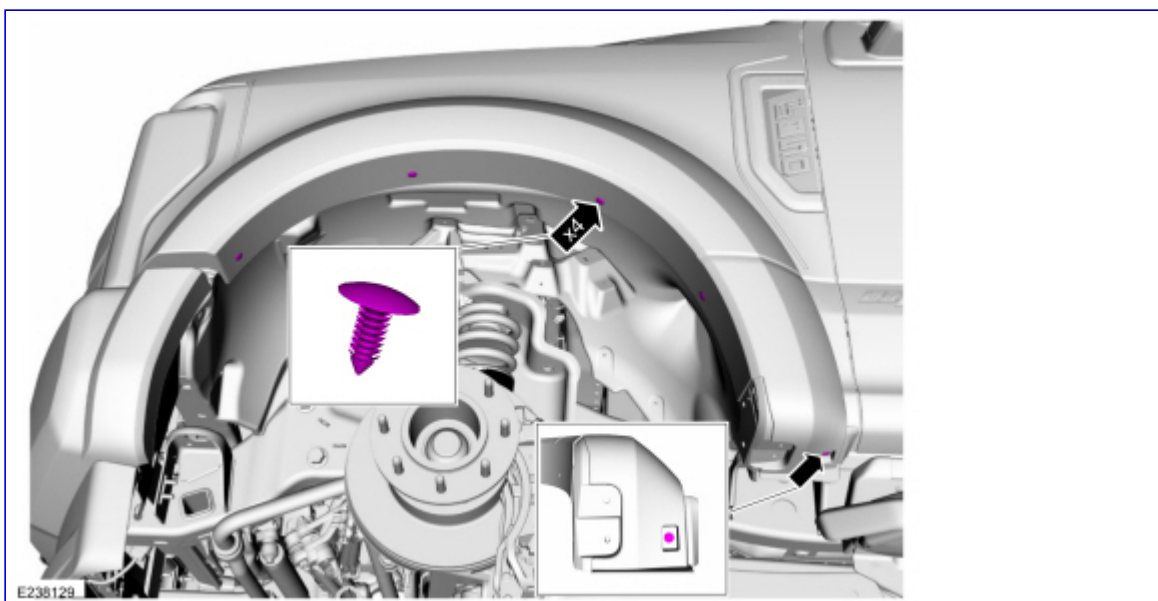

3. **NOTE:** Moulding attaches to 2 inner panels which are held on to the fender with the pushpin clips. When servicing the moulding assembly the inner panels are removed from the fender.

Using a non-marring trim tool, disengage the trim clips and remove the front fender moulding.

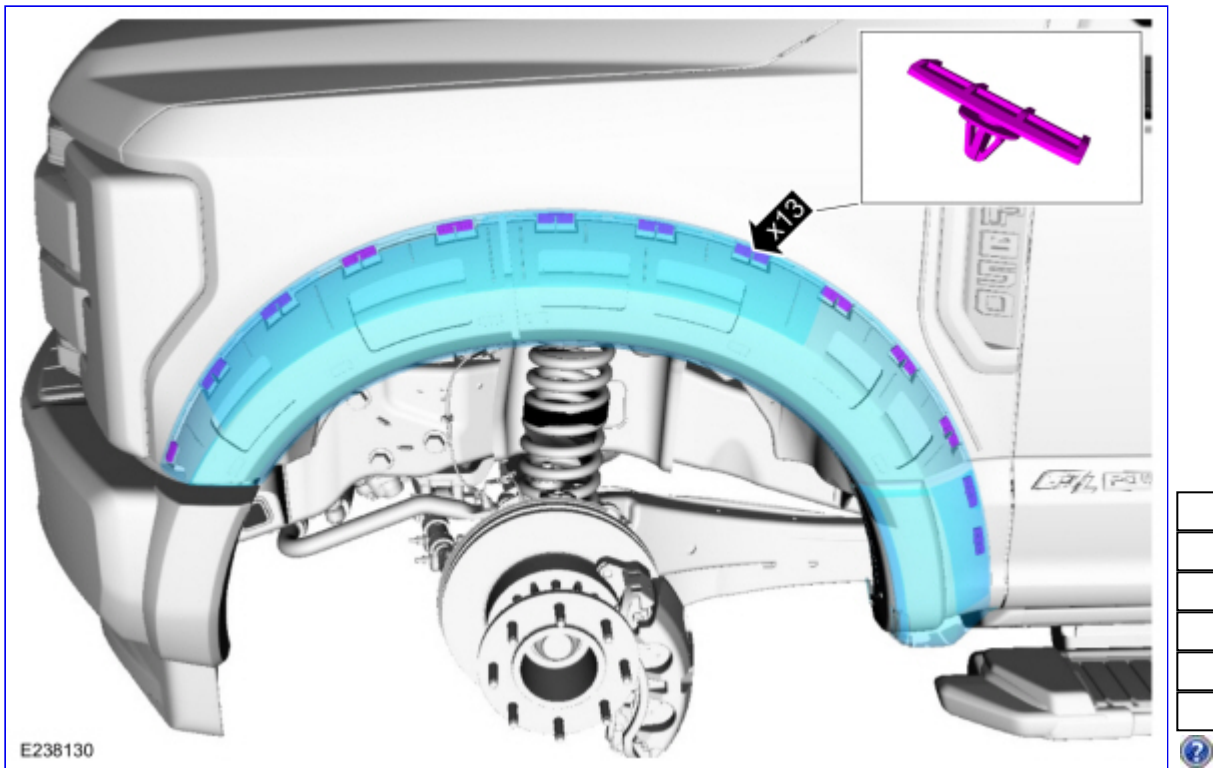

Installation

1. To install, reverse the removal procedure.

Copyright © 2019 Ford Motor Company

This publication contains material that is reproduced and distributed under a licence from Ford Motor Company. No further reproduction or distribution of the Ford Motor Company material is allowed without the express written permission of Ford Motor Company.

Copyright 2007 - 2019 Service Repair Solutions, Inc.